


BATHS

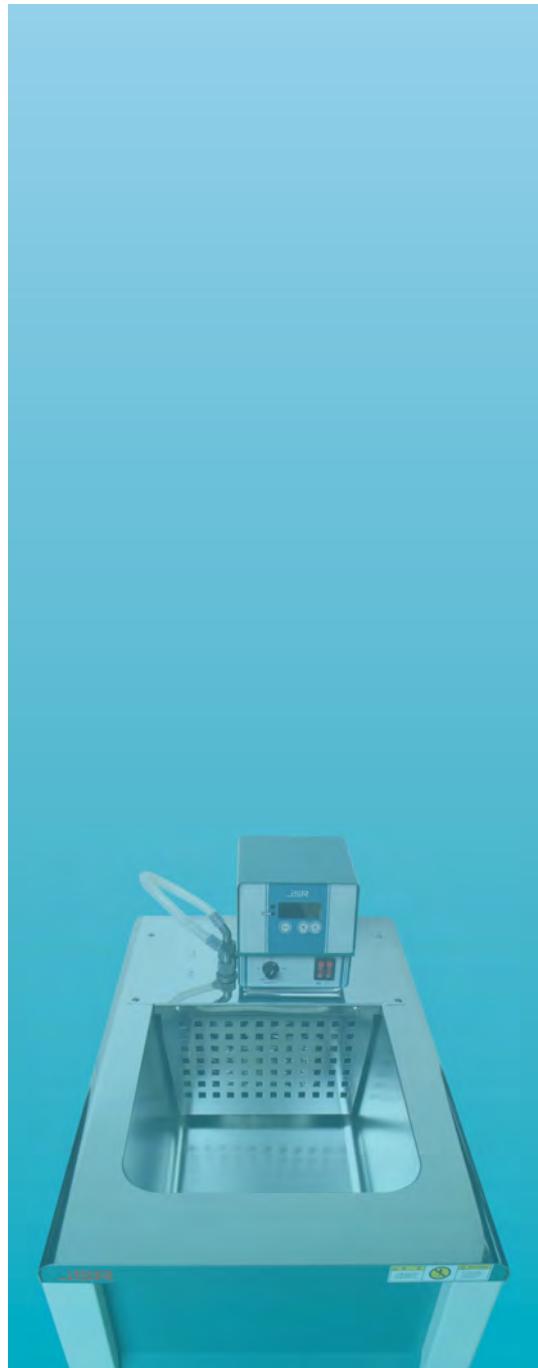

JSR

[주] 제이에스리서치
JS Research Inc.

Laboratory

WATER BATH

JSWB-Series Heated Bath



- amb. +5 °C ~ 80 °C (99 °C)
- Constant Temperature
- Timer On / Off

JSOB-Series Digital Oil Bath



- amb. +10 °C ~ 250 °C
- Constant Temperature
- Timer On / Off



MODEL	CAPACITY	TEMPERATURE	ACCURACY
JSWB-06T(L)	6 L	JSWB-TL amb. + 5 °C ~ 80 °C	
JSWB-11T(L)	11 L		± 0.1 °C
JSWB-22T(L)	22 L	JSWB-T amb. + 5 °C	
JSWB-30T(L)	30 L	~ 99 °C	

MODEL	CAPACITY	TEMPERATURE	ACCURACY
JSOB-100T	11 L	amb. + 10 °C	
JSOB-200T	20 L	~ 250 °C	± 1.0 °C
JSOB-300T	33 L		

JSVB-Series Visco-Sight Bath



- amb. +5 °C ~ 99 °C
- Constant Temperature
- Timer On / Off
- Glass Window
- Internal Circulation

JSEB-Series Extraction Bath



- amb. +5 °C ~ 99 °C
- Constant Temperature
- Timer On / Off
- 6 to 10 Multi-Extraction Ports



MODEL	CAPACITY	TEMPERATURE	ACCURACY
JSVB-30T	31 L	amb. + 5 °C ~ 99 °C	± 0.1 °C

MODEL	CAPACITY	TEMPERATURE	ACCURACY
JSEB-60T	6 Ports	amb. +5 °C	
JSEB-62T	2 x 3 Ports	~ 99 °C	± 0.5 °C
JSEB-82T	2 x 4 Ports		
JSEB-102T	2 x 5 Ports		

JSIB-Series Circulation Bath



- amb. +5 °C ~ 99 °C
- Constant Temperature
- Timer On / Off
- Internal and external Circulation Pump
- Flow Rate : 8 L/min
- Pressure : 0.3 bar



MODEL	CAPACITY	TEMPERATURE	ACCURACY
JSIB-11T	11 L		
JSIB-22T	22 L	amb. +5 °C	
JSIB-50T	48 L	~ 99 °C	± 0.1 °C
JSIB-100T	100 L		

JSRC-C(L) Series Refrigerated Circulation Bath



- - 20 (- 40) °C ~ 120 °C
- Constant Temperature
- Timer On / Off
- Internal and external Circulation Pump
- Flow Rate : 10 L/min
- Pressure : 0.5 bar



MODEL	CAPACITY	TEMPERATURE	ACCURACY
JSRC-06C(L)	7 L	JSRC-C	
JSRC-13C(L)	11 L	-20 °C ~ 120 °C	
JSRC-22C(L)	20 L	JSRC-CL	± 0.1 °C
JSRC-30C(L)	30 L	-40 °C ~ 120 °C	

JSCT-Series JSTC-Series Ultra-Low Cold Trap Bath



- Minimum Temperature -25 °C ~ - 85 °C
- On/Off Temperature Control



MODEL	CAPACITY	MINIMUM TEMPERATURE
JSCT-25C		- 25°C
JSCT-55ULT	7.2 L	- 55 °C
JSTC-85ULT		- 85 °C
JSTC-55ULT	2.8 L	- 55 °C
JSTC-85ULT		- 85 °C

JSSB-Series Shaking Water Bath



- amb. +5 °C ~ 99 °C
- Constant Temperature
- Timer On / Off
- Shaking Speed 20 ~ 120 rpm
- 25 mm stroke reciprocal motion



MODEL	CAPACITY	TEMPERATURE	ACCURACY
JSSB-30T	30 L	amb. +5 °C	
JSSB-50T	50 L	~ 99 °C	± 0.2 °C

Laboratory WATER BATH

Controller

▶ JSC-0D [BASIC]



- $\pm 0.1^{\circ}\text{C}$ Digital PID Controller with automatic START/STOP timer max. 99min 59sec / 99hr 59min / 99day 23hr
- Digital LED displays operating status such as TEMP and remaining TIME
- Temperature calibration
- Auto-tuning function
- Class A Pt-100 Ω sensor
- Audio Visual Alarms
- 정밀한 PID 콘트롤러는 온도를 $\pm 0.1^{\circ}\text{C}$ 단위로 제어
- 예약 / 정지 타이머 내장 99분59초/99시간59분/99일23시간
- 온도 보정, 오토튜닝 기능 내장
- Class A Pt-100 Ω 온도센서
- 안전한 작동을 위한 다양한 시청각적 알람

▶ JSC-7S Controller for Shaking Water Bath




- Integrated Digital PID Controller
- Temperature control with $\pm 0.1^{\circ}\text{C}$
- Shaking speed control within $\pm 1 \text{ rpm}$
- Automatic STOP timer Max. 99min 59sec / 99hr 59min / 99day 23hr
- Dual digital LED displays TEMP, RPM and remaining TIME
- Temperature calibration
- Shaking speed calibration
- Slow Start and Stop Control
- Auto-tuning function
- Class A Pt-100 Ω sensor
- 온도, 속도, 타이머 통합제어 PID 콘트롤러
- 온도제어 정밀도 : $\pm 0.1^{\circ}\text{C}$
- 교반속도 제어 정밀도 : $\pm 1 \text{ rpm}$
- 타이머 설정 최대 99분 59초/99시간 59분 /99일 23시간
- 현재온도, 교반속도, 잔여시간 디스플레이
- 온도 및 속도 보정 기능
- 작동 시 가속 및 감속 속도 제어
- 오토튜닝 기능 내장
- Class A Pt-100 온도센서

Performance & Convenience

Safety

▶ Construction



- Durable epoxy powder coated metallic casing
- High quality stainless steel 304 bath
- 내구성이 뛰어난 에폭시 분체 도장과 스테인레스 스틸 304 배스

▶ Seamless Bath



- Easy to clean Electro-Polished seamless SUS304 Bath with perforated stainless steel bottom plate
- 부식에 강한 전해 연마 처리된 Stainless Steel (SUS304) 배스는 코너에 이음새가 없어 세척과 유지보수가 간편

▶ Lids



- Stainless steel flat cover to help reduce heat losses and evaporation
- 온도유지와 물의 증발을 방지하기 위한 커버

‣ DUAL OVER TEMP. CUT-OFF

- 1) Digital system cut-off heater and AUDIO VISUAL ALARM in case +2°C above set temperature
- 2) Analog system cut-off heater 10% above set temp.
- MAX TEMP CUT-OFF heater and AUDIO VISUAL ALARM when if +1°C above maximum limit
- SENSOR DISCONNECTION ALARM
- LOW WATER LEVEL SENSOR (Specific models only)
- OVER CURRENT CUT-OFF : Electrical Leakage Breaker or Fuse

‣ 이중과열방지장치

- 1) 설정온도 +2 °C 초과 시 히터 차단 및 시청각알람
- 2) 콘트롤러 오류로 지정 온도 10% 초과 시 히터차단
- 최고온도알람기능 : 작동 한계온도+1°C 초과시 히터 차단
- 센서단락알람
- 저수위감지센서 (일부모델)
- 누전차단기 (퓨즈) : 전기누설 시 주전원 차단

▶ Drain



- Drain for easy emptying of bath fluid [Depends model]
- 배수용 드레인 밸브 장착 [일부모델]

▶ Circulation Pump



- Stainless Steel or magnetic driven pump for internal and external circulation of bath fluid
- Stainless Steel 또는 Magnetic Pump는 용액을 내부 또는 외부로 순환

▶ Maintenance



- Easy to maintain refrigeration system
- 편리한 유지보수

Extraction COD BATH

CHEMICAL OXYGEN DEMAND Digestion Bath



Φ 30mm, 60mm, 90mm, 110 mm

-  Multi-Port Extraction
-  Heated amb.+5 °C ~ 99.9 °C
-  Timer On / Off 
-  Constant Temperature Controller

Extraction COD Bath

JSEB-Series Extraction COD Digestion Bath is the most popular thermo reactor for determination Chemical Oxygen Demand in various substances. Chemical Oxygen Demand (COD) is a measure of the capacity of water to consume oxygen during the decomposition of organic matter and the oxidation of inorganic chemicals.

Supplied with size adjustable concentric ring covers and frame set to hold glassware.

Temperature range from ambient +5 to 99.9 °C

Specifications

Heating	Direct Immersion Sheath Heater
Temp. Range	ambient + 5 °C ~ 99.9 °C
Accuracy	± 0.5 °C at 60.0°C
Uniformity	± 1.0 °C at 60.0°C
Control	Microprocessor PID Control Auto START / STOP Timer
Sensor	Class A Pt-100 Ω Sensor
Safety	Over-Temperature Cut-Off Over Current Cut-Off
Material	Body : Epoxy Powder Coated Steel Bath : Stainless Steel 304 Concentric Ring Cover : Stainless Steel 304
Electric	220±10% VAC 50/60Hz 1-Phase
Plug config.	 or 

Control Accuracy

- ± 0.1 °C Digital PID Controller with automatic START/STOP timer max. 99min 59sec / 99hr 59min / 99day 23hr
- Temperature calibration, auto-tuning function
- Class A Pt-100 Ω sensor
- 정밀한 PID 콘트롤러는 온도를 ± 0.1 °C 단위로 제어
- 예약 / 정지 타이머 내장 99분59초 / 99시간59분 / 99일23시간
- 온도보정, 오토튜닝 기능 내장
- Class A Pt-100 Ω 온도 센서

Performance

- › Durable epoxy powder coated metallic casing
- › Corrosion resistant Stainless Steel 304 bath
- › Corrosion resistant stainless steel 304 sheath immersion heater directly heating water in the bath to reach set temperature quickly
- › Perforated heater cover helps convection of heated water circulation to maintain thermal uniformity of the bath
- › Maximum temperature up to 99.9 °C, accuracy ± 0.1°C

- › 내구성이 뛰어난 에폭시 분체 도장 본체
- › 내부식성이 뛰어난 Stainless Steel 304 재질의 배스
- › 내구성이 뛰어난 스테인레스 스틸 (SUS304) 재질의 히터
가 수조를 직접 가열하여 신속히 설정 온도에 도달
- › 다공성 히터커버는 가열된 물이 배스 내부로 균일하게 순환
되도록 설계되어 균일한 온도 분포
- › 최고 가열 온도 99.9 °C, ± 0.1°C 의 탁월한 정밀도

Convenience

- › Easy to clean polished Stainless Steel 304 Bath
- › Perforated stainless steel bottom plate
- › Drain for easy emptying of the bath fluid
- › Supplied with stainless steel cover with concentric ring cover set of various size openings of dia. 30 mm, 60 mm and 90 mm, 110 mm
- › Stainless steel pipe frame set to hold glassware clamps

- › 부식에 강한 연마 처리된 Stainless Steel(SUS304) 배스는
세척과 유지보수가 간편
- › Stainless Steel 304 재질의 바닥 타공판
- › 배수용 드레인밸브장착
- › Stainless Steel 304 재질의 링커버 세트 dia. 30mm, 60mm 90mm
- › Stainless Steel 304 재질의 프레임세트

Safety

- › DUAL OVER TEMP. CUT-OFF
- › MAX TEMP CUT-OFF heater and AUDIO VISUAL ALARM
- › SENSOR DISCONNECTION ALARM
- › OVER CURRENT CUT-OFF FUSE
- › 이중과열방지장치
- › 최고온도알람기능 : 작동 한계온도 +1°C 초과 시 히터 차단
- › 센서단락알람
- › 누전차단기 : 전기 누설 시 주전원 차단

Accessories

Art No.	Descriptions
PHH-X01	Pipe Holder
PHH-X02	Clamp holder max grip 19 mm
PHH-X03	2-prong clamp Length 60 mm
PHH-X04	3-prong clamp Length 60 mm
PHH-X05	3-prong clamp Length 80 mm



Ordering Information

	JSEB-60T	JSEB-62T	JSEB-82T	JSEB-102T
Number of Extraction Ports	6	2 x 3	2 x 4	2 x 5
Dimensions Inner W x D x H mm	920 x 162 x 150 980 x 265 x 300	490 x 322 x 150 665 x 395 x 300	650 x 322 x 150 815 x 395 x 300	850 x 322 x 150 965 x 395 x 300
Temperature Range			ambient +5 °C ~ 99.9 °C	
Accuracy at 60.0°C			± 0.5 °C	
Uniformity at 60.0°C			± 1.0 °C	
Standard Accessories	Stainless Steel Frame Set, 4ea x PHH-X01 Pipe Holder			
Heater Capacity	3.0 kW	3.0 kW	4.0 kW	5.0 kW
Power Rating	13.6 Amp	13.6 Amp	18.2 Amp	23.0 Amp
Power Plug	CEE 7/7 Schuko	CEE 7/7 Schuko	30 Amp	30 Amp